

HRE SERIES

Horizontal Restaurant Exhausters



INDUSTRIES SERVED

- Restaurant

FEATURES

- UL705 Supplement SC Listed for the removal of cooking vapors
- Meets NFPA-96 Installation guidelines
- Convenient hinged curb mounting
- Clean-out access door
- Fully welded, 16 gauge or heavier blower housing c/w shaft seal to eliminate grease leakage
- 2 inch drain connection
- Pillow block ball bearings
- Upblast discharge directs exhaust away from roof
- Heavy duty, backward inclined non-overloading wheel



AVAILABLE WITH MOTORS & DRIVES FACTORY INSTALLED. CONSULT OUR DELTAIR FAN SELECTION SOFTWARE FOR DETAILS.



UL705 Supplement SC - Power Ventilator for Restaurant Exhaust Appliances certified, refer to our UL705 Supplement SC - Power Ventilator for Restaurant Exhaust Appliances Catalogue page C in Roof Mount Ventilation for all installation requirements


CURRENTLY ONLY AVAILABLE IN CANADA




UL705 POWER VENTILATOR FOR RESTAURANT EXHAUST APPLIANCES

DIMENSIONS


MODEL	A	CURB (SQUARE)	AU	C	D	E	H	L	RO	SHAFT DIAMETER	UNIT WEIGHT (LBS) (without motors & drives)
HRE-13	21 1/2"	20 1/2"	27 7/16"	25 1/4"	14 3/4"	10 5/8"	30 15/16"	41 7/8"	17 1/2"	1"	147
HRE-16	25 1/2"	24 1/2"	31 1/2"	30 3/8"	17 7/8"	13 1/4"	34 1/4"	48 11/16"	21 5/16"	1 3/16"	204
HRE-20	29 1/2"	28 1/2"	35 7/8"	36 1/8"	21 9/16"	15 5/8"	40 1/16"	56 1/8"	25 1/2"	1 3/16"	251
HRE-24	34 1/2"	33 3/8"	40 5/8"	43 3/8"	26 5/16"	19 1/2"	43 5/8"	66 7/8"	30 1/8"	1 7/16"	362

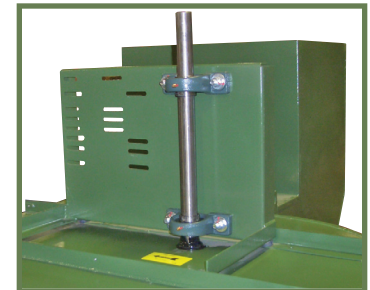

UNIT SHOWN WITH COVER REMOVED

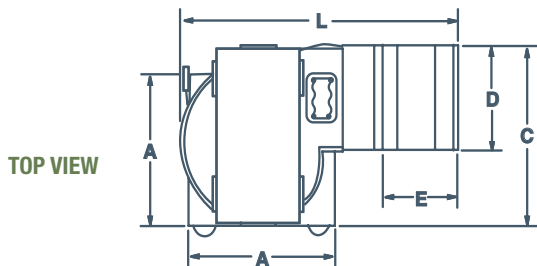


TOP VIEW

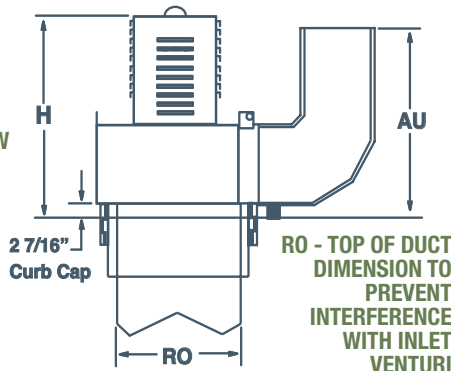

SIDE VIEW

RO - TOP OF DUCT DIMENSION TO PREVENT INTERFERENCE WITH INLET VENTURI



2" DRAIN CONNECTION



CONVENIENT CLEAN OUT ACCESS DOOR

OPTIONAL ACCESSORIES

- Vented roof curbs comes with hinge
- For additional information on roof curbs, see page C27.
- Discharge "V" cap (rain cap)